




MINIBREAKOUT 12-24 FO

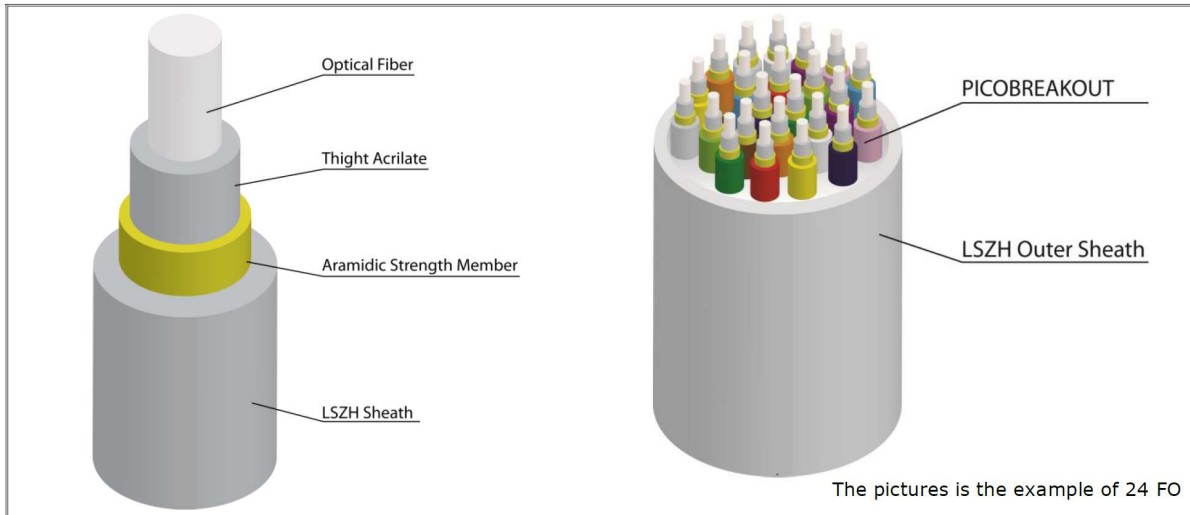

1. COLOUR CODE

ACCORDING TO NORMS OF REFERENCE

2. GENERAL CHARACTERISTICS UM

		VALUE	
N° PICOBREAKOUT		12 FO	24 FO
		(nom. PICOBREAKOUT diam. 0,875±0,10 mm)	
Min. outer sheath thickness	mm	1,3	1,2
Outer sheath material		LSZH	
Nominal diameter	mm	6,4	8,5
Nominal weight	kg/km	40	60

3. CABLE PERFORMANCES

TEST

TEST	NORME DI RIFERIMENTO	VALORI
Min. Bending Radius	IEC 60794-1-2 E10	5 x Cable O.D.
Tensile strenght	IEC 60794-1-2 E1	400 N Δ att. $\leq 0,1\text{db/km}$
Crush	IEC 60794-1-2 E3	500 N Δ att. $\leq 0,1\text{db/km}$
Impact	IEC 60794-1-2 E4	Energy: 1 J N° impact: 3 Δ att. $\leq 0,1\text{db/km}$
Temperature cycle	IEC 60794-1-2 F1	$-10^{\circ}\text{C}/+60^{\circ}\text{C}$ Δ att. $\leq 0,1\text{db/km}$

4. NORMS OF REFERENCE


- OPEN FIBER ST 1730
- ITU-T G657A2
- EN 50575

5. OUTER SHEATH MARKING

ACCORDING TO NORMS OF REFERENCE



MINIBREAKOUT-EXT CABLE (INDOOR/OUTDOOR)

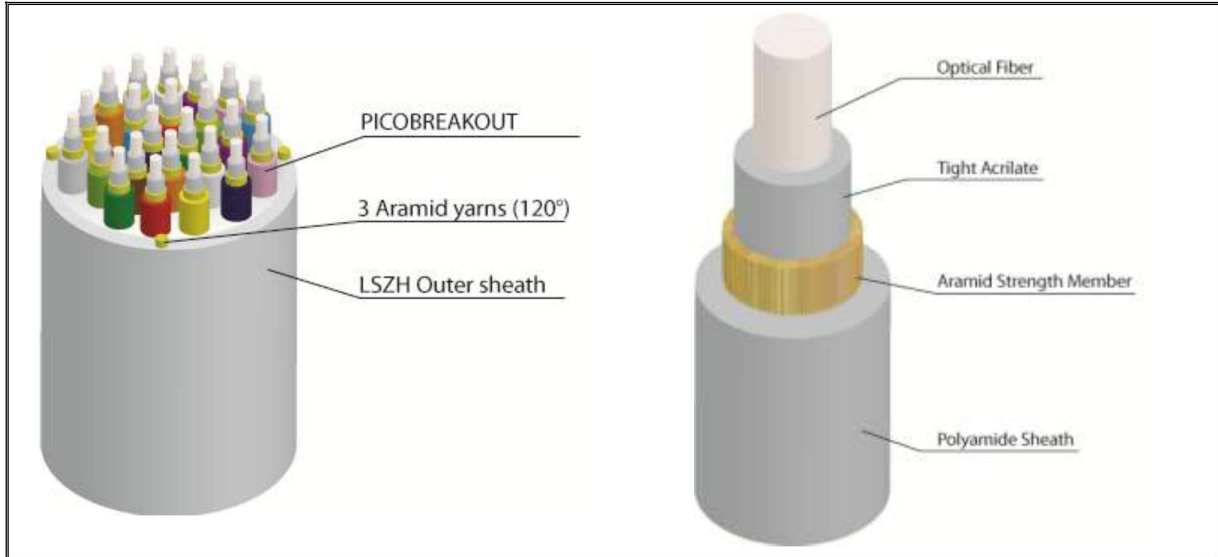

1. COLOUR CODE

1.1 PICOBREAKOUT COLOUR

N° FIBER	COLOUR	N° FIBER	COLOUR	N° FIBER	COLOUR
1	Red	9	White	17	Blue + black ring
2	Light Green	10	Aqua	18	Purple + black ring
3	Yellow	11	Pink	19	Dark Green + black ring
4	Brown	12	Grey	20	Orange + black ring
5	Blue	13	Red + black ring	21	White + black ring
6	Purple	14	Light Green + black ring	22	Aqua + black ring
7	Black	15	Yellow + black ring	23	Pink + black ring
8	Orange	16	Brown + black ring	24	Grey + black ring

1.3 MINIBREAKOUT COLOUR

Grey RAL 7001