

900 μ m Cable Pig-Tail



T E C H N I C A L S P E C I F I C A T I O N



1. Connectors available:

SC / FC / ST / LC / MU / E2000 / DIN / SMA / MTRJ

2. Typical Insertion Loss:

[dB] @ 1550nm for singlemode cables according to IEC 61753-1

Opl polishing	IL	RL
PC	Grade C	Grade 2
UPC	Grade C	> 50 dB
APC	Grade C	Grade 1

[dB] @ 1300nm for multimode cables

Opl polishing	IL	RL
PC	Grade B	Grade 3

Any other IL and RL specification on requests.

3. Cables available :

Buffer	9/125 G652.D	9/125 G652.E	9/125 G655.E	9/125 G657.A1
Tight	Yellow, White and Red	Easy Strip Yellow	no	on request
Loose Easy Strip	Natural and 12 colours IEC 60304 & TIA 598.A Red, Green, Blue, Yellow, White, Grey, Brown, Violet, Aqua, Black, Orange, Pink.	no	Yellow	Yellow

Buffer	50 OM2	50 OM3	50 OM4	62.5 OM1
Tight	Green, White	on request	on request	Orange
Loose	12 colours IEC 60304 & TIA 598.A Red, Green, Blue, Yellow, White, Grey, Brown, Violet, Aqua, Black, Orange, Pink.	Aqua	Aqua	Red, Green, Blue, Yellow, White, Brown, Violet, Orange.



4. Length Tolerance:

< 10 m : - 0 / +10 cm

> 10 m : - 0 / +1%


5. Sets of 4-6-8-12 and 24 pigtails with colours according to TIA598.A

FIBER COLOUR CODING TIA/EIA 598.A					
1	BLUE		13	BLUE	- - -
2	ORANGE		14	ORANGE	- - -
3	GREEN		15	GREEN	- - -
4	BROWN		16	BROWN	- - -
5	SLATE/GREY		17	SLATE/GRAY	- - -
6	WHITE		18	WHITE	- - -
7	RED		19	RED	- - -
8	BLACK		20	BLACK	- - -
9	YELLOW		21	YELLOW	- - -
10	VIOLET		22	VIOLET	- - -
11	ROSE/PINK		23	ROSE/PINK	- - -
12	AQUA		24	AQUA	- - -



6. Labelling and Packaging

Each single pigtail in transparent plastic bag with label and 25 or 100 pigtails in a small carton box with label. Customised labels are available on request.

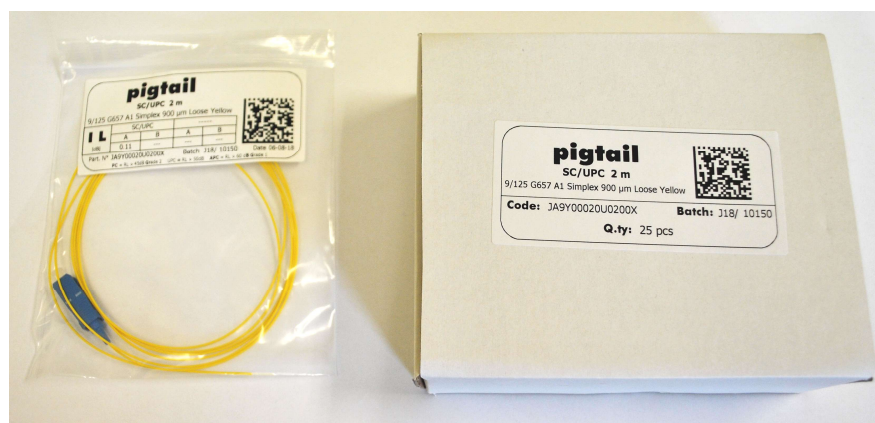

The Product is **RoHS and REACH compliant**.

E N D O F S P E C I F I C A T I O N

